

Performance curves:

ETN 70



Impeller




| | | | | | |
|------------------------|----------------------------|----------------------------|---------|--------------------------------|------------------|
| Type: Closed | Max. Ø: 145 [mm] | Min. Ø: 119 [mm] | Sel. Ø: | Outlet width: 0 [mm] | Bearing bracket: |
|------------------------|----------------------------|----------------------------|---------|--------------------------------|------------------|

Operating data

| | | | | | |
|-----------------------------|------------|-------------------|----|---------------------------------|-----------------------------------|
| Speed: 1450 [rpm] | Frequency: | Duty point: Q= | H= | Suction port: 80 [mm] | Discharge port: 50 [mm] |
|-----------------------------|------------|-------------------|----|---------------------------------|-----------------------------------|

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [yC]

Curve number: ETN7014

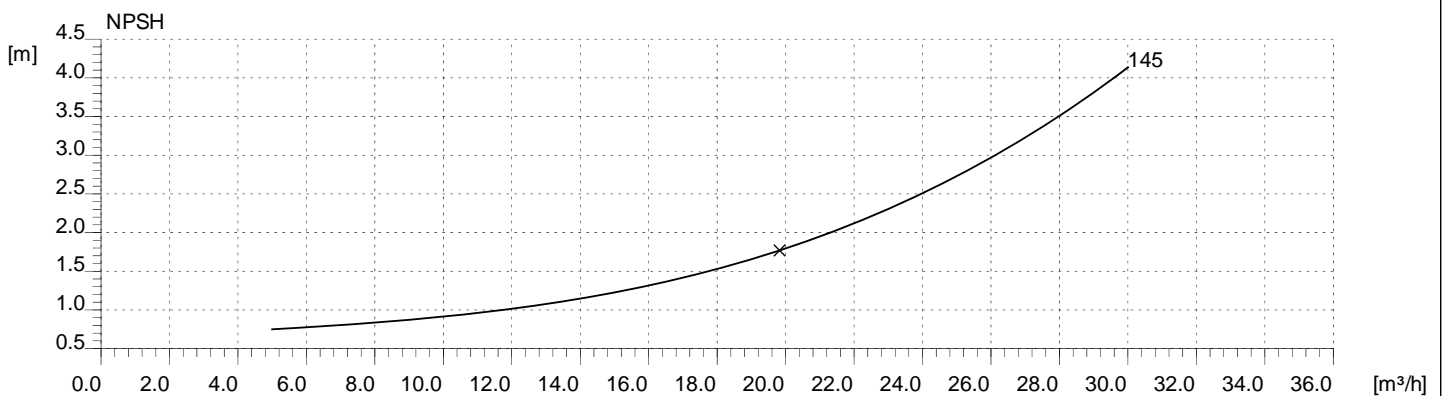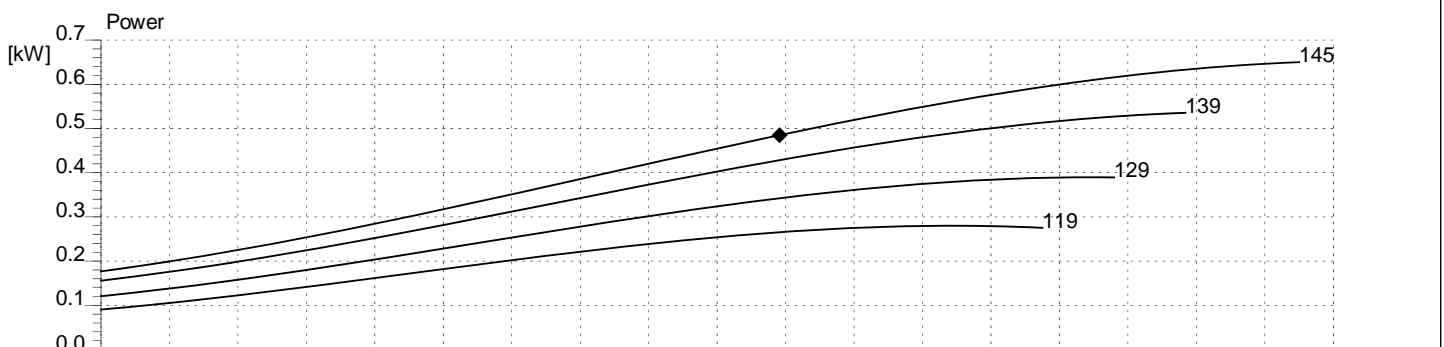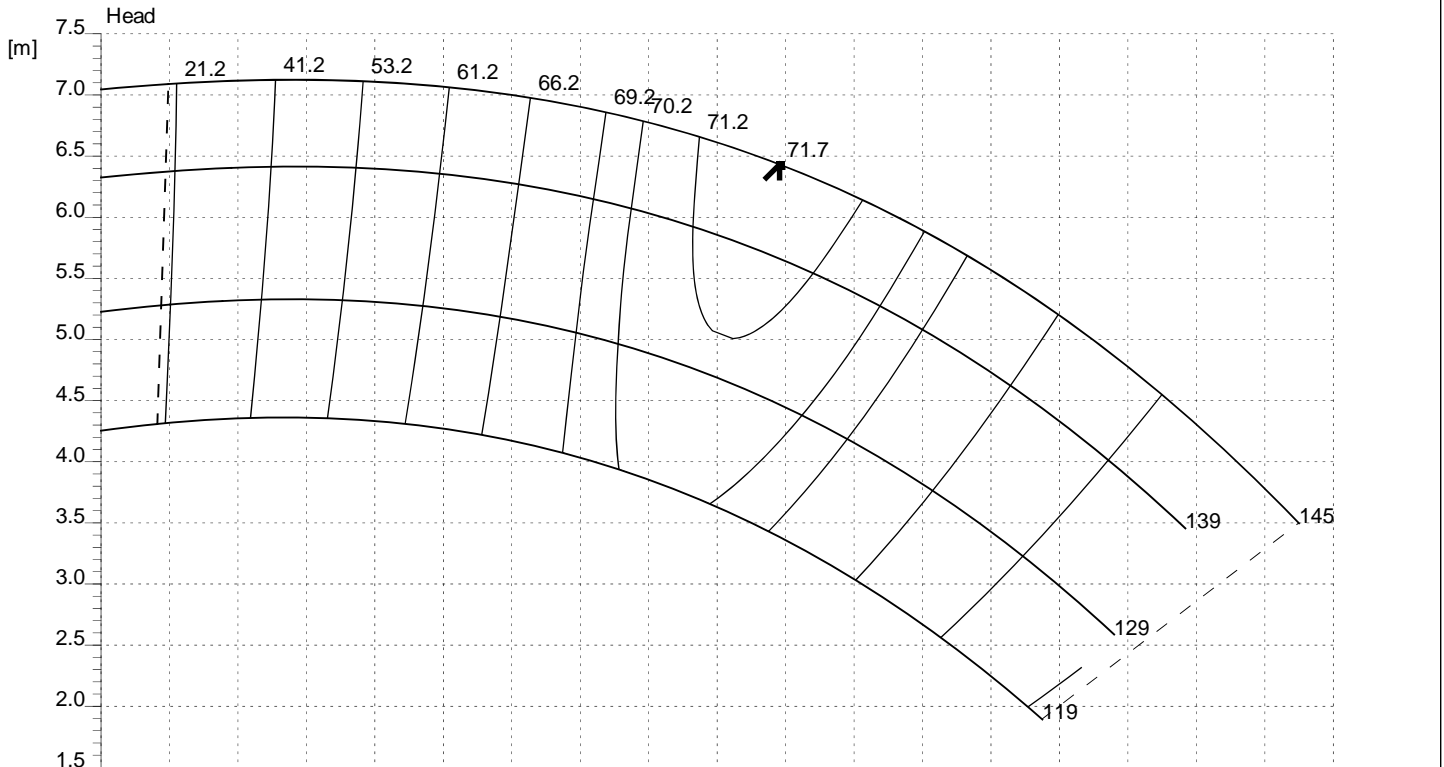

| | | | |
|----------|--------------|-------------|----------------------------|
| Project: | Project no.: | Created by: | Date: 2007-06-14 |
|----------|--------------|-------------|----------------------------|