

Performance curves:


HTS 100



Impeller					
Type: Peripheral	Max. Ø: 103 [mm]	Min. Ø: 102 [mm]	Sel. Ø:	Outlet width: 0 [mm]	Bearing bracket:
Operating data					
Speed: 2900 [rpm]	Frequency:	Duty point: Q=	H=	Suction port: 25 [mm]	Discharge port: 25 [mm]

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [°C]

Curve number: HTS1002

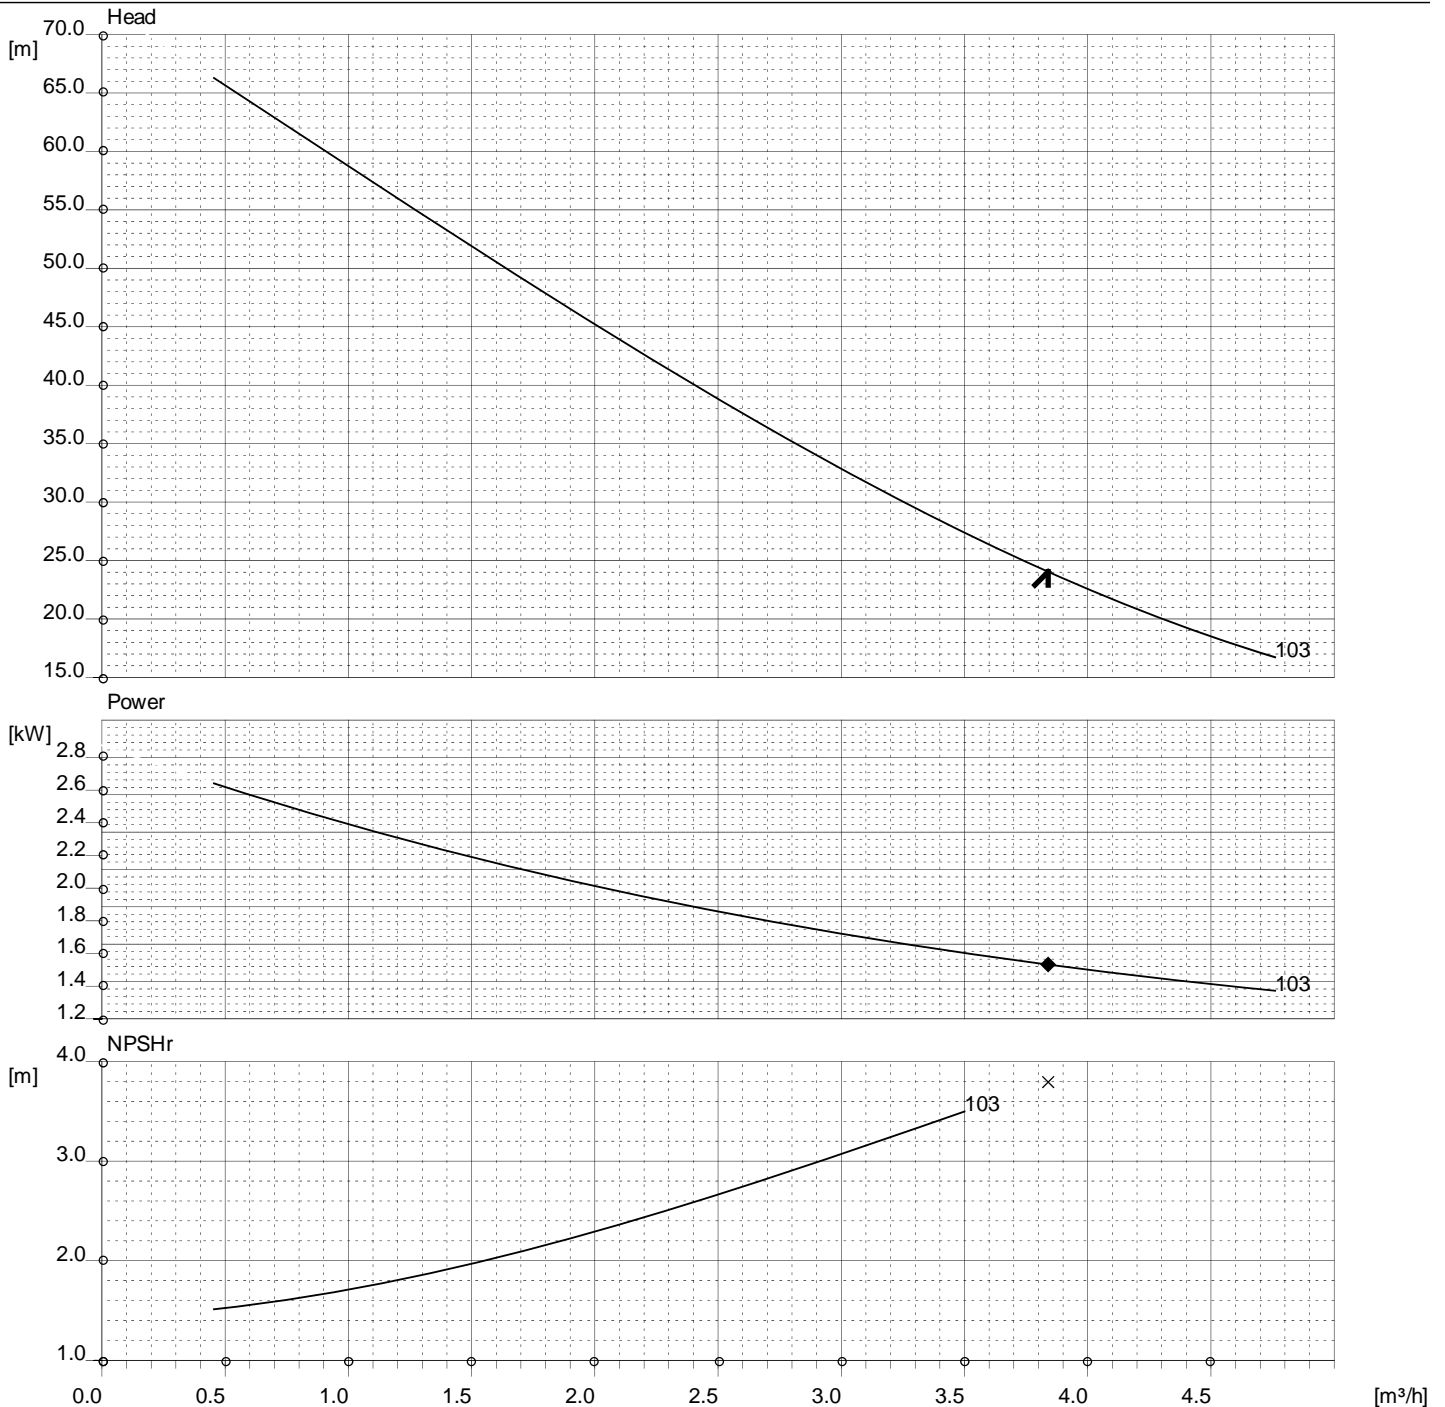

Project:	Project no.:	Created by:	Date: 2007-11-14
----------	--------------	-------------	----------------------------