

# Performance curves:


## HTS 130



Impeller					
Type: Peripheral	Max. Ø: <b>128 [mm]</b>	Min. Ø: <b>127 [mm]</b>	Sel. Ø:	Outlet width: <b>0 [mm]</b>	Bearing bracket:
Operating data					
Speed: <b>1450 [rpm]</b>	Frequency:	Duty point: Q=	H=	Suction port: <b>25 [mm]</b>	Discharge port: <b>25 [mm]</b>

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [°C]

Curve number: HTS1301

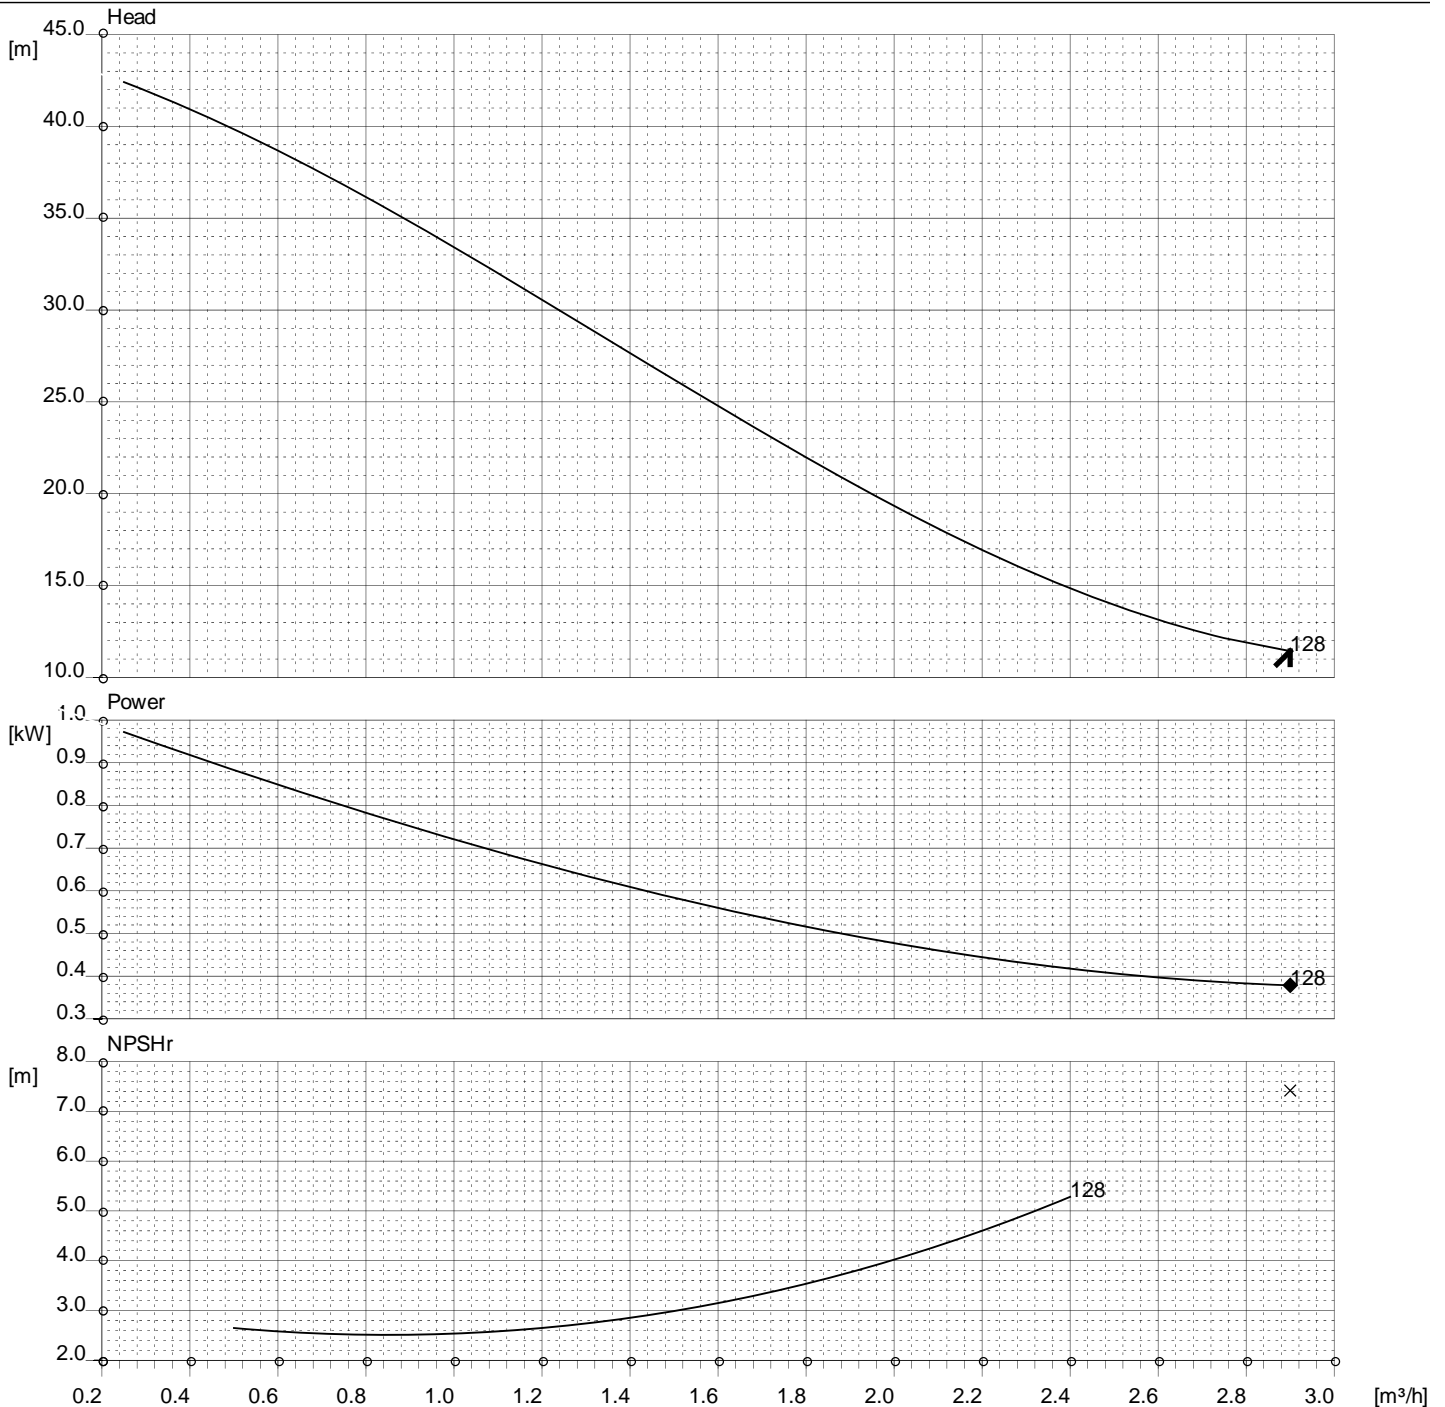

Project:	Project no.:	Created by:	Date: <b>2008-05-20</b>
----------	--------------	-------------	----------------------------