

# Performance curves:


## UCS 65-40-160



| Impeller                    |                            |                            |         |                                 |                                   |
|-----------------------------|----------------------------|----------------------------|---------|---------------------------------|-----------------------------------|
| Type:<br><b>Closed</b>      | Max. Ø:<br><b>172 [mm]</b> | Min. Ø:<br><b>109 [mm]</b> | Sel. Ø: | Outlet width:<br><b>0 [mm]</b>  | Bearing bracket:                  |
| Operating data              |                            |                            |         |                                 |                                   |
| Speed:<br><b>1450 [rpm]</b> | Frequency:                 | Duty point:<br>Q=          | H=      | Suction port:<br><b>65 [mm]</b> | Discharge port:<br><b>40 [mm]</b> |

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [°C]

Curve number: UCS65-40-1601

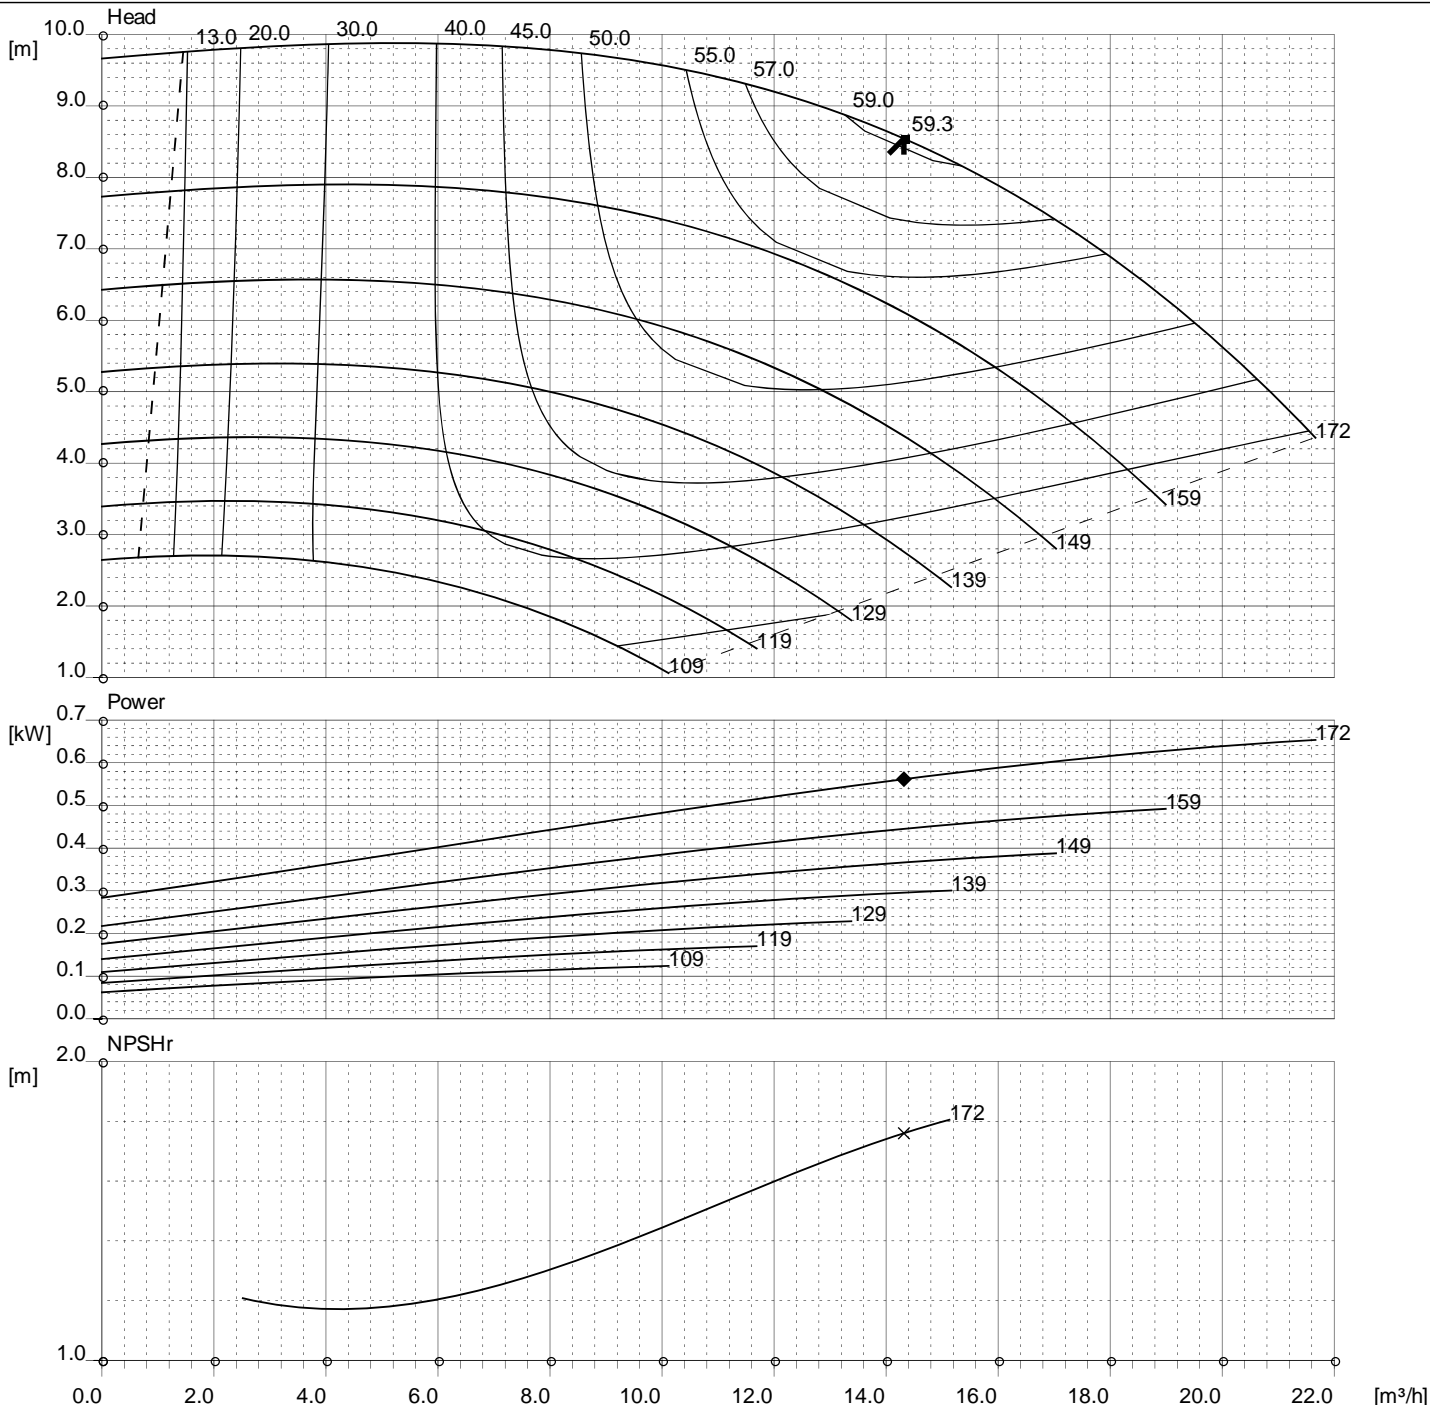

|          |              |             |                            |
|----------|--------------|-------------|----------------------------|
| Project: | Project no.: | Created by: | Date:<br><b>2007-11-12</b> |
|----------|--------------|-------------|----------------------------|