

Performance curves:


UCS-B 50-32-160



| Impeller | | | | | |
|-----------------------------|----------------------------|----------------------------|---------|---------------------------------|-----------------------------------|
| Type: Closed | Max. Ø: 172 [mm] | Min. Ø: 109 [mm] | Sel. Ø: | Outlet width: 0 [mm] | Bearing bracket: |
| Operating data | | | | | |
| Speed: 2900 [rpm] | Frequency: | Duty point: Q= | H= | Suction port: 50 [mm] | Discharge port: 32 [mm] |

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [°C]

Curve number: UCSB50-32-160

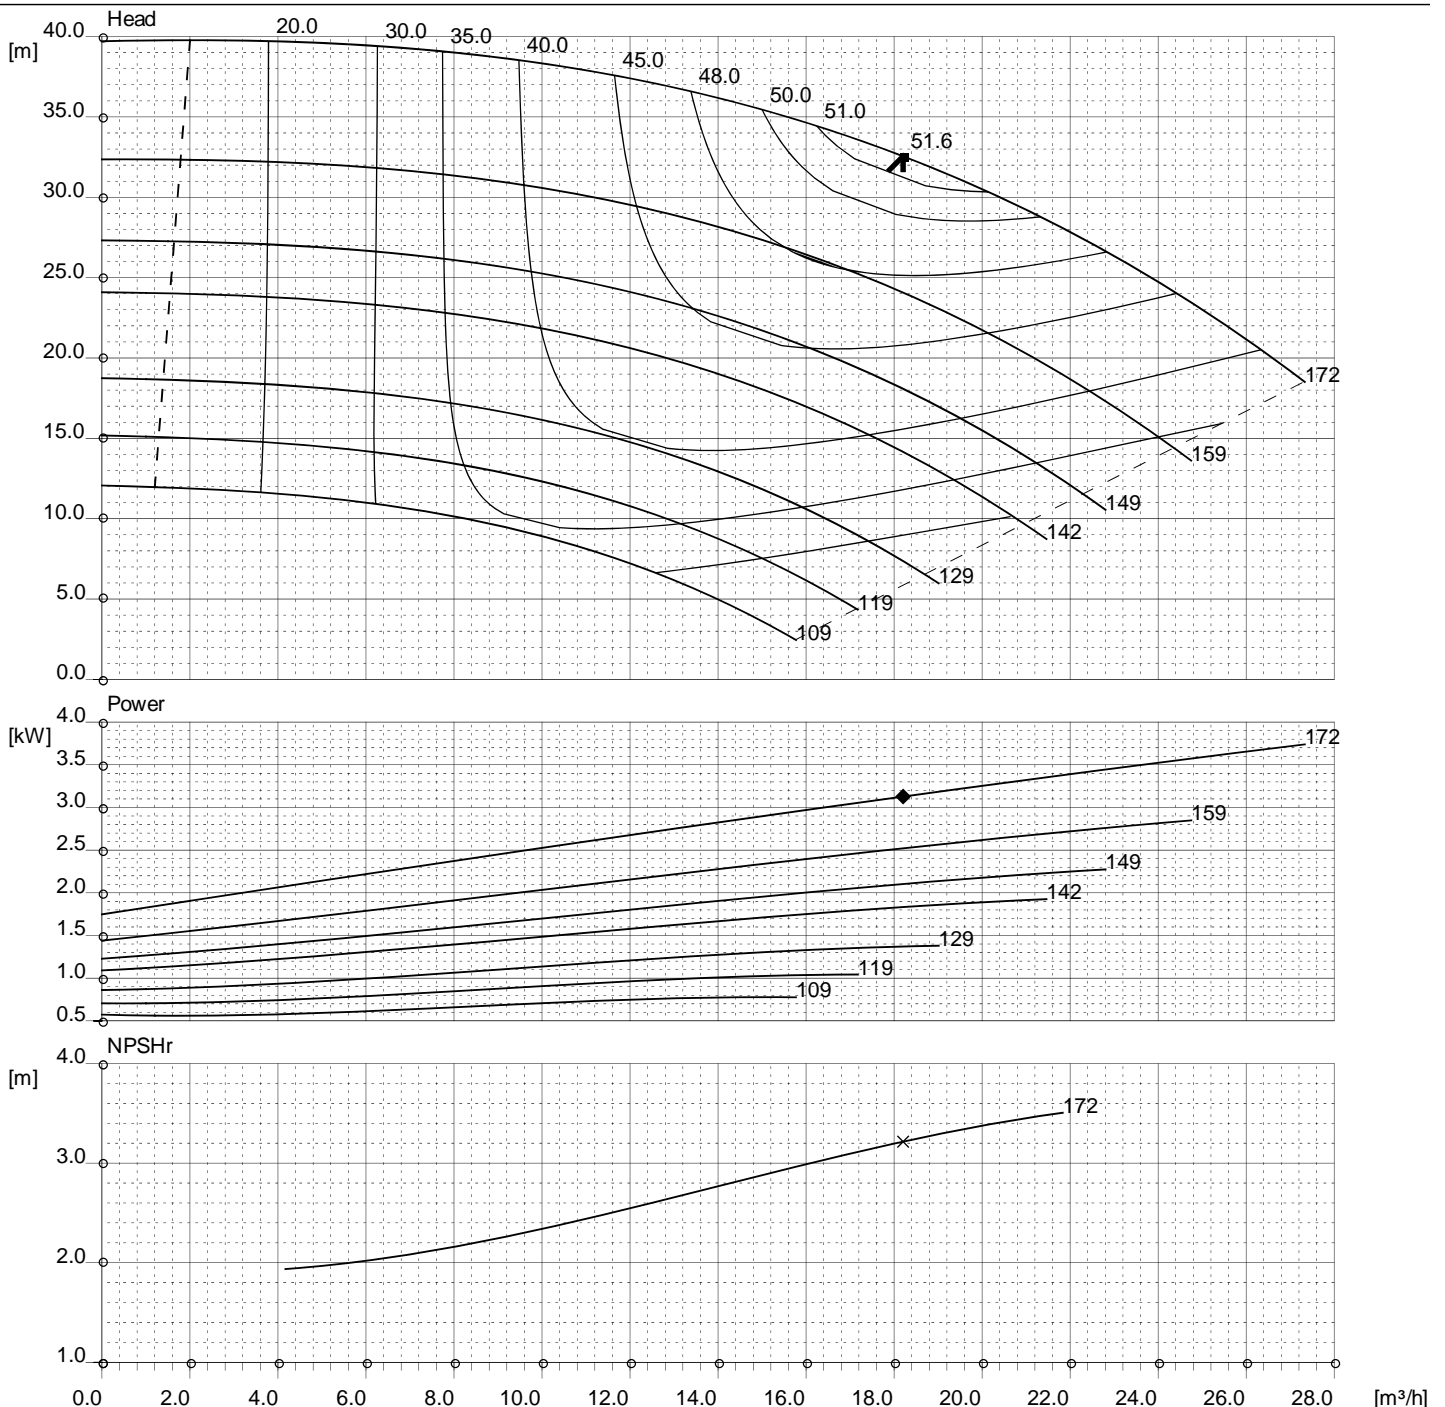

| | | | |
|----------|--------------|-------------|----------------------------|
| Project: | Project no.: | Created by: | Date: 2007-11-12 |
|----------|--------------|-------------|----------------------------|