

Performance curves:




UTS 125-80-160

| Impeller | | | | | |
|-----------------|---------------------|---------------------|---------|-------------------------|------------------|
| Type: Closed | Max. Ø: 169 [mm] | Min. Ø: 140 [mm] | Sel. Ø: | Outlet width: 0 [mm] | Bearing bracket: |

| Operating data | | | | | |
|----------------------|------------|-------------------|----|---------------------------|----------------------------|
| Speed: 2900 [rpm] | Frequency: | Duty point: Q= | H= | Suction port: 125 [mm] | Discharge port: 80 [mm] |

Power data referred to: Water; 1.000 [kg/dm³]; 20.0 [yC]

Curve number: UTS125-80-16029

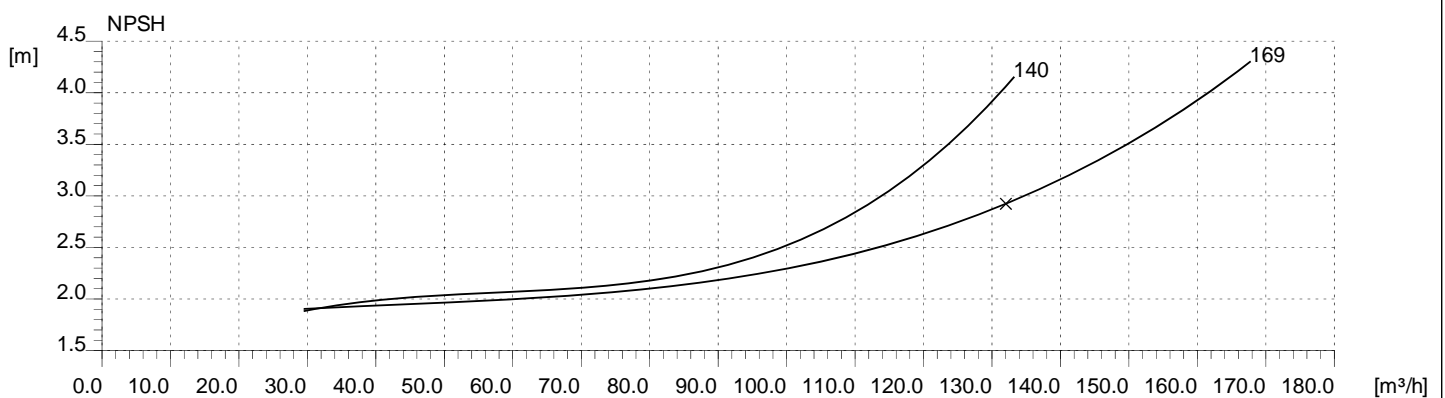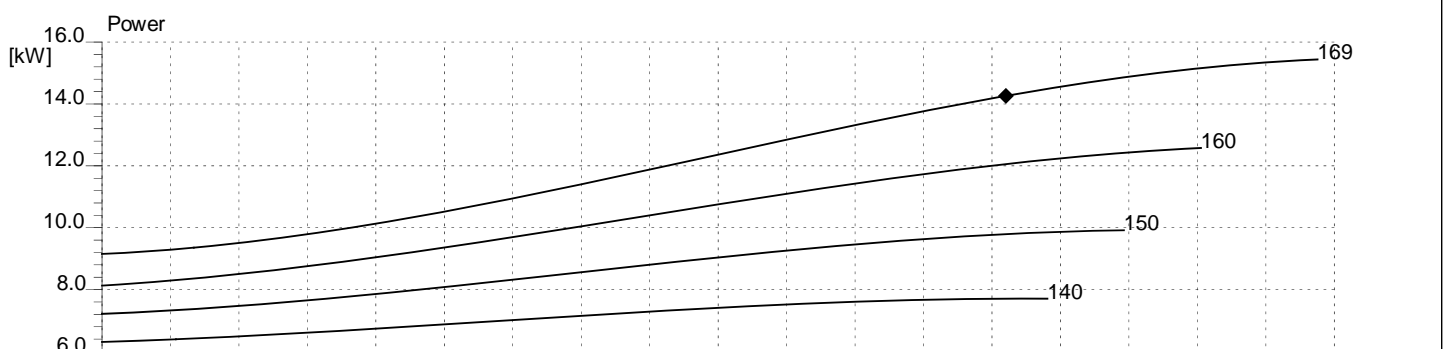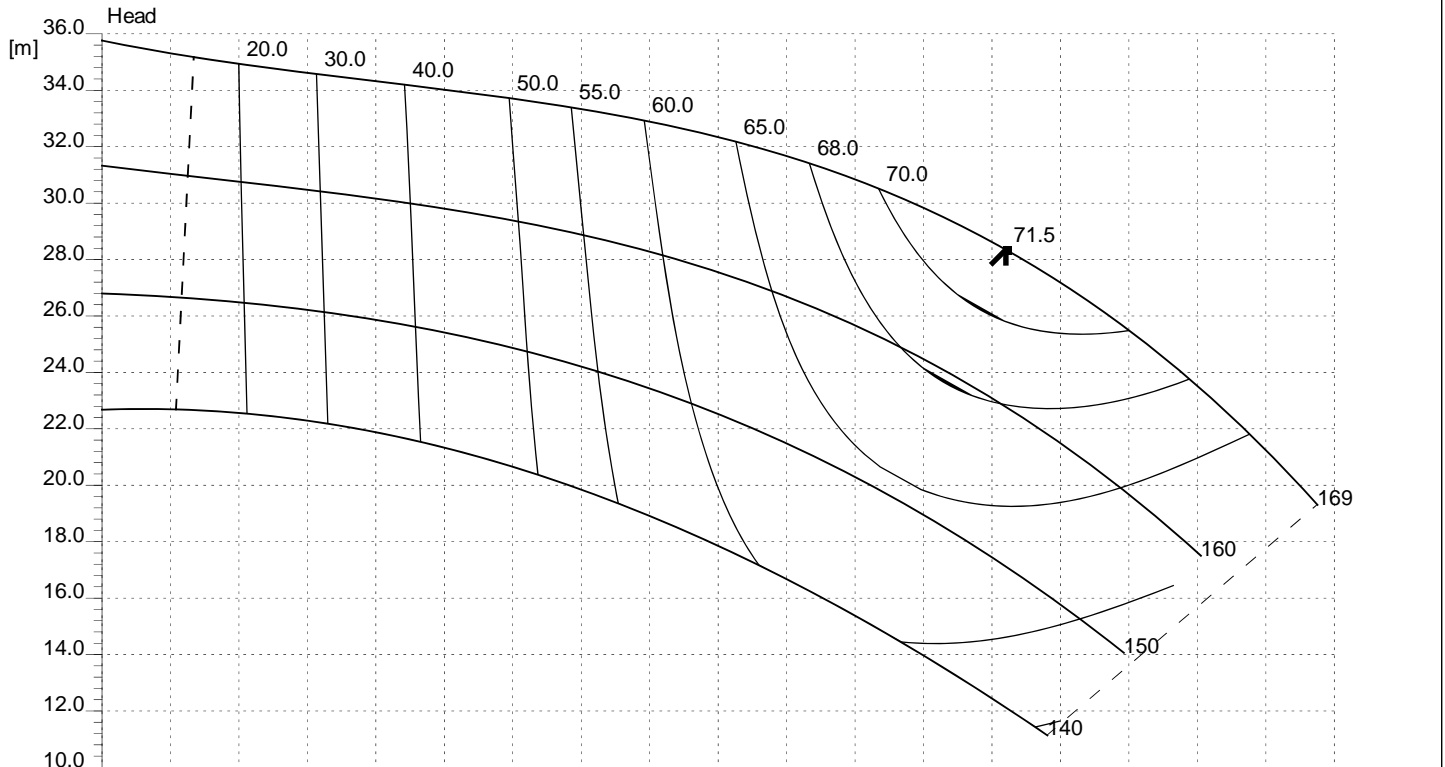

| | | | |
|----------|--------------|-------------|---------------------|
| Project: | Project no.: | Created by: | Date: 2007-07-25 |
|----------|--------------|-------------|---------------------|