Performance curves:

UTS-B 80-50-125

Impeller					
Type: **Closed**	Max. Ø: **142 [mm]**	Min. Ø: **109 [mm]**	Sel. Ø: **0 [mm]**	Outlet width: **0 [mm]**	Bearing bracket:

Operating data				
Speed: **2900 [rpm]**	Frequency:	Duty point: Q= **0,0 [m³/h]** H= **0,0 [m]**	Suction port: **80 [mm]**	Discharge port: **50 [mm]**

Power data referred to: Water; 1,000 [kg/dm³]; 20,0 [ýC]

Curve number: UTS-B80-50-12529

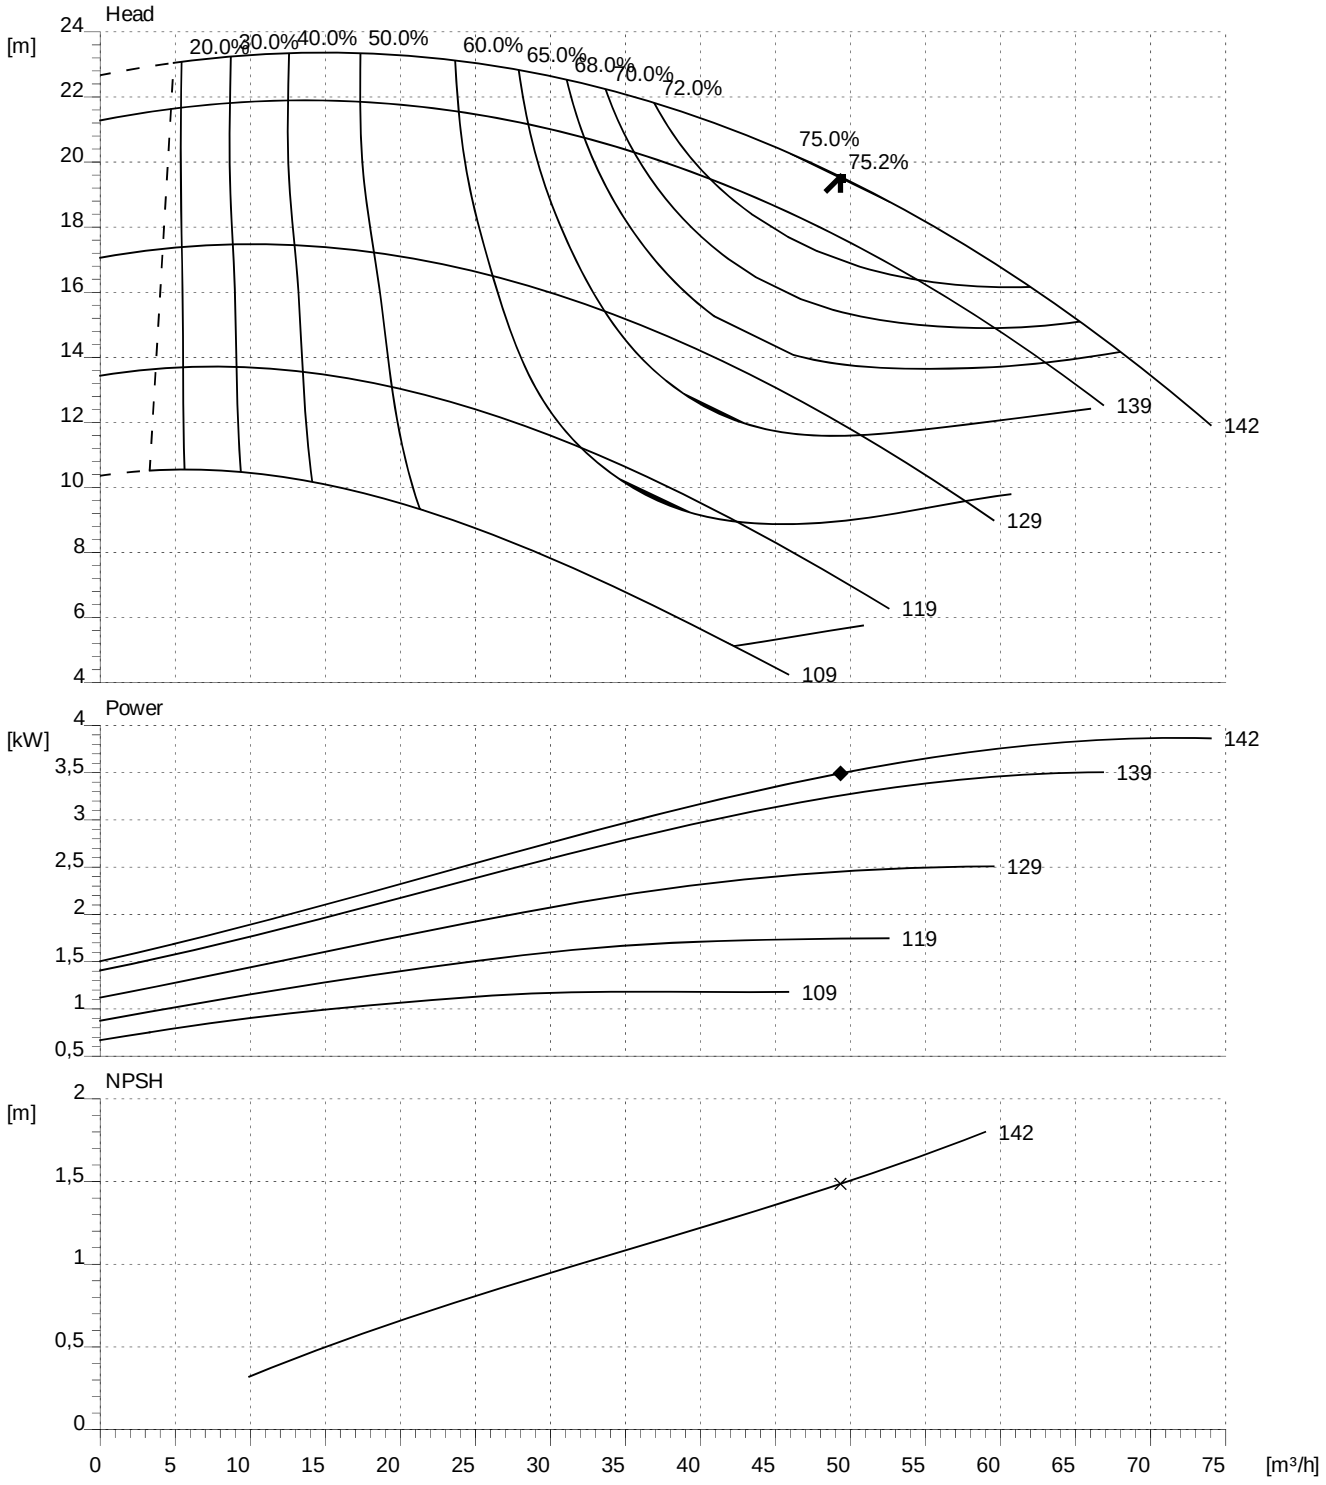

Project:	Project no.:	Created by:	Date: **2006-04-04**